


MOTOBATT

QuadFlex™ Battery
 WWW.MOTOBATT.COM
 MB7U



Physical Dimensions: (in./mm)

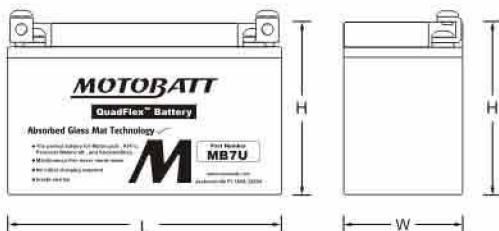

L: 5.90(150) W: 2.56(65) H: 3.70(94)

Tolerances are +/0.04in.(+/1mm) and +/0.08in.(+/2mm) for height dimensions.

Features

- 12V VRLA Hi Capacity Starting Battery
- Absorbed Glass Mat (AGM) technology
- Brass Terminals - superior conductivity
- US IATA certified non-spillable
- Highest AH Capacity in the Industry
- Factory Activated-Ready to Install

Performance Specifications

Nominal Voltage ----- 12 volts (6 cells)

Nominal Capacity

20-hr. (0.325A to 10.50 volts)-----	6.7 AH
10-hr. (0.65A to 10.50 volts)-----	6.5 AH
5-hr. (1.3A to 10.20 volts)-----	5.5 AH
1C. (6.5A to 9.6 volts)-----	41Min (4.44AH)
8C. (52A to 6.00 volts)-----	3Min (2.6AH)

Approximate Weight ----- 4.96 lbs. (2.25kg)

Energy Density (20-hr. rate) ----- 1.44W-h/in³ (87.7 W-h/l)

Specific Energy (20-hr. rate) ----- 16.2W-h/lb (35.7 W-h/kg)

Internal Resistance (approx) ----- 20 milliohms

CCA (-0.4°F/-18°C, 7.2V,30S)----- 100 amperes

CA (68°F/20°C, 7.2V,30S)----- 180 amperes

Shelf Life (% of nominal capacity at 68°F (20°C))----- SOC% OCV

1 Months -----	97%	12.78V
3 Months -----	91%	12.7V
6 Months -----	83%	12.5V

Operating Temperature Range

Charge ----- -4°F(-20°C) to 122°F(50°C)

Discharge ----- -40°F(-40°C) to 140°F(60°C)

Case ----- ABS

Carton Contents ----- 1-MotoBatt MB7U Battery,
 2 screws, Install / user manual.




RETAIL CARTON




SCREW


Shelf life & Storage

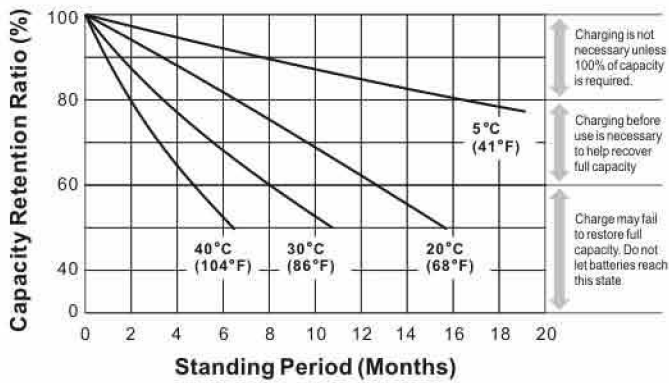


Discharge Characteristics

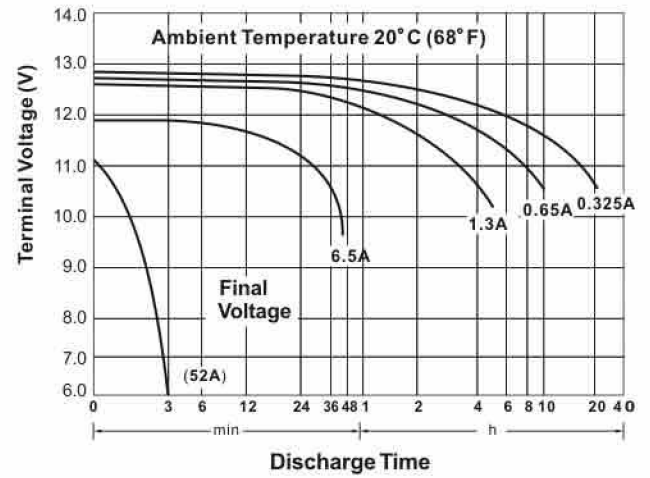

Discharge Time vs. Discharge Current

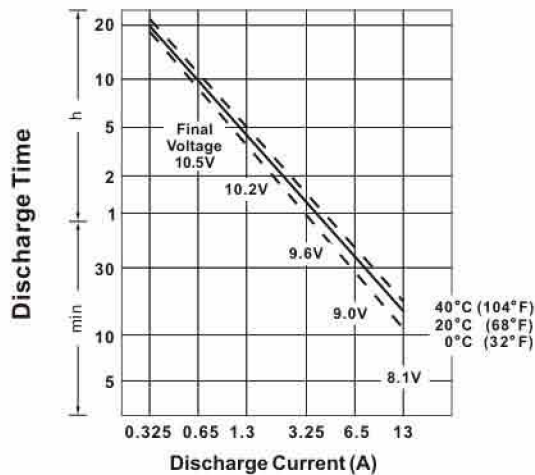

Life Characteristics in Cyclic Use

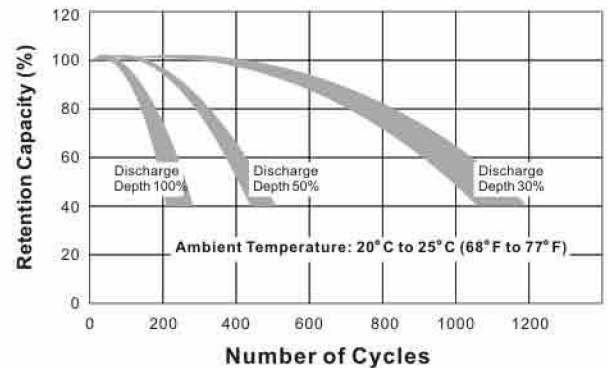

Charging

Cycle Applications: limit initial current to 1.95A. Charge until battery voltage (under charge) reaches 14.8 to 15.0 volts at 68°F(20°C). Hold at 14.8 to 15.0 volts until current drops to under 130mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

Note: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Can be used to replace

YT7BBS	YT7B4		

Chargers

MotoBatt offers a wide range of chargers suitable for batteries up to 2A. Please refer to the charger selection guide. Please contact our technical department for advice if you have difficulty in locating suitable models or contact us at www.motobatt.com

Further Information

Please refer to our website www.motobatt.com to locate a distributor in your area.