



DC335-6

DEEP CYCLE

335AH @ 20Hr
6-Volt

Group Size: J305 / 902

Maintenance-Free
Sealed AGM Battery

CYCLING CAPACITY

20 Hour Rate **335 Amp Hours**

RESERVE CAPACITY

Reserve @25 AMPS **751 Minutes**

Reserve @75 AMPS **184 Minutes**

ELECTRICAL SPECIFICATIONS

| | |
|---------------------|------------------|
| Nominal Voltage | 6 Volt |
| C100 | 370AH |
| C20 | 335AH |
| C10 | 300AH |
| C5 | 274AH |
| CCA | 1300 |
| CA or MCA | 1560 |
| HPCA | 2000 Amps |
| Internal Resistance | 1.6m Ω |


MECHANICAL SPECIFICATIONS

| | | |
|----------------------|--|----------------|
| Group Size | J305 / 902 | |
| Terminal Type | DTW | |
| Terminal Torque | See reverse side | |
| Height (w/ terminal) | 14.37" | 365mm |
| Height (case only) | 13.58" | 345mm |
| Width | 7.00" | 178mm |
| Length | 11.61" | 295mm |
| Weight | 105.4 lbs. | 47.8 kg |
| Case Type | ABS Plastic - Flame Res. Rating UL94-HB | |

DISCHARGE TABLE (Constant Current)

| Time | Amps | Rate |
|------|------|--------|
| 20hr | 16.8 | 0.05CA |
| 10hr | 30.0 | 0.10CA |
| 8hr | 36.4 | 0.13CA |
| 5hr | 54.8 | 0.25CA |
| 3hr | 73.9 | 0.33CA |
| 2hr | 102 | 0.50CA |
| 1hr | 184 | 1.00CA |


DISCHARGE PROFILE (Constant Current)

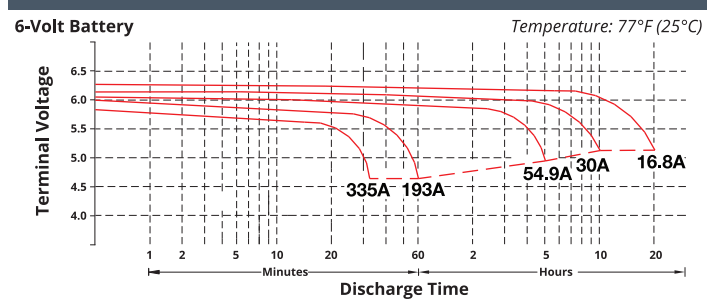

- All listed ratings are @ 100% SoC, T=77°F (25°C), 1.75VPC unless otherwise specified.


- Specifications listed are for estimation purposes only. Battery performance can vary depending on application. Battery design subject to change.

BATTERY & TERMINAL DIMENSIONS (All units shown in mm)

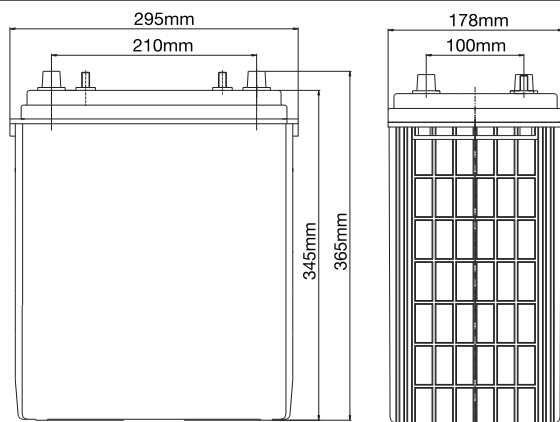

Battery bank spacing required,
12.5mm (1/2" inch) minimum

Terminal: DTW (Dual AP & Stud)

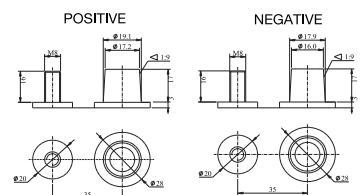


(unit: mm)




DC335-6 DATA SHEET

fullriverbattery.com

TEMPERATURE vs CAPACITY

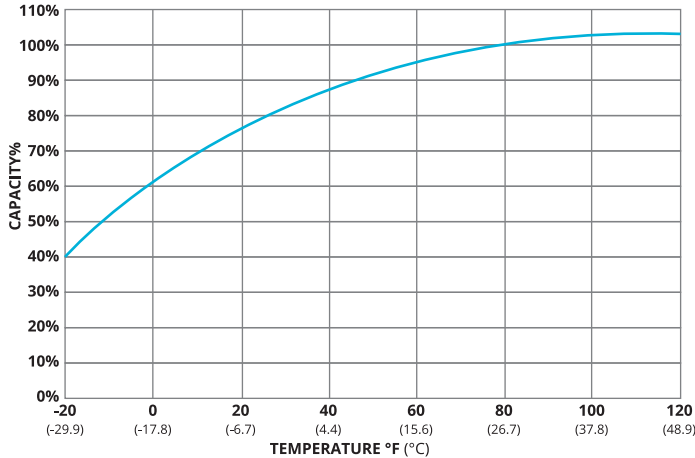


STATE of CHARGE (SOC) vs OPEN CIRCUIT VOLTAGE (OCV)

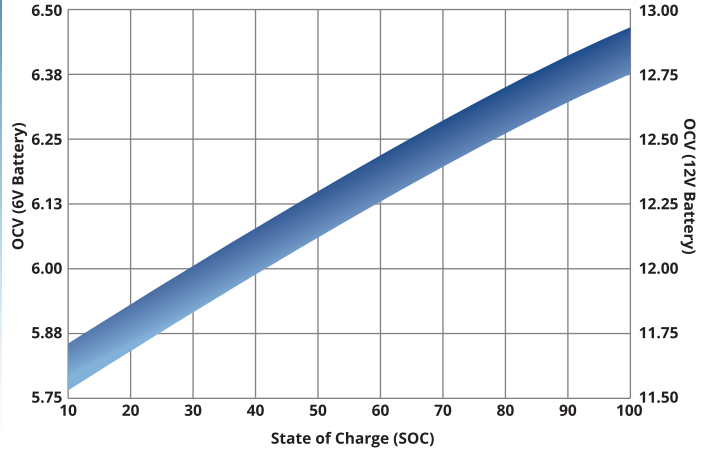


CYCLE LIFE vs DEPTH of DISCHARGE (DOD)

*(Based on BCI Testing @ 2-hr Rate)

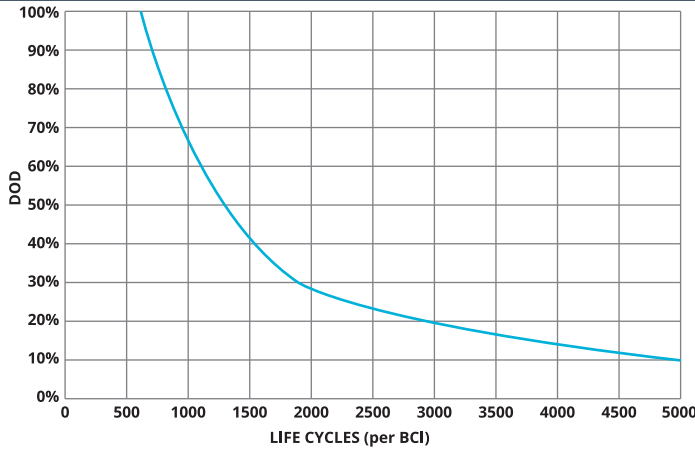

SELF DISCHARGE vs TIME/TEMPERATURE

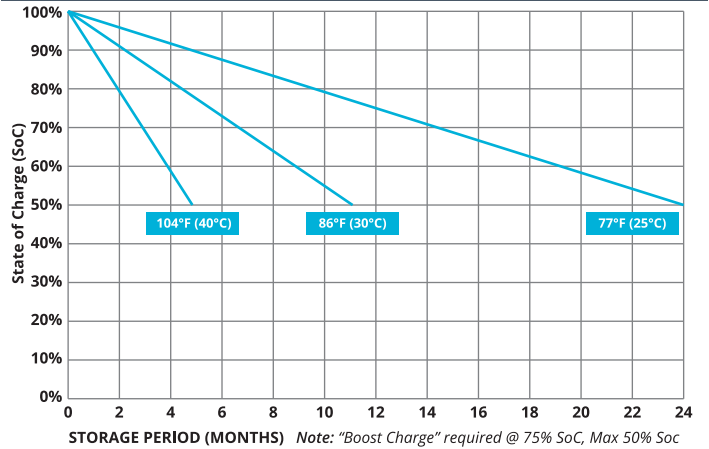

TEMPERATURE RANGE SPECIFICATIONS

| Condition | Recommended | Maximum | Recommended | Maximum |
|----------------|---------------|----------------|---------------|---------------|
| Storage | 5°F to 122°F | -40°F to 160°F | -15°C to 50°C | -40°C to 71°C |
| Operation | 5°F to 104°F | -40°F to 160°F | -15°C to 40°C | -40°C to 71°C |
| Charge with TC | 5°F to 122°F | -40°F to 160°F | -15°C to 50°C | -40°C to 71°C |
| Charge w/o TC | 32°F to 104°F | 5°F to 122°F | 0°C to 40°C | -15°C to 50°C |

*TC= Temperature Compensation

CHARGE VOLTAGES

| Charge Stage | Battery Voltages | | | |
|--------------|------------------|-------|-------|-------|
| | 12V | 24V | 36V | 48V |
| Bulk | 14.7V | 29.4V | 44.1V | 58.8V |
| Absorption | 14.7V | 29.4V | 44.1V | 58.8V |
| Float | 13.6V | 27.2V | 40.8V | 54.6V |

TC Factor: (-2mV°F/cell) or (-4mV°C/cell)

TERMINAL TORQUE SPECS

| Terminal Type | ft-lbs | in-lbs | Nm |
|---|------------|---------|------------|
| AP, DT (AP), M6, M6M (Stud), TP07 (AP), TP08 (AP) | 4.2 - 6.0 | 50-70 | 5.6 - 7.9 |
| FR45 | 6.0 - 7.5 | 70-90 | 7.9 - 10.1 |
| M8 | 7.1 - 8.0 | 85-95 | 9.6 - 10.7 |
| DT (Stud), M10M (Stud) | 9.2 - 10.4 | 110-125 | 12.2 - 14 |



9001:2008 Quality Management System
 14001:2004 Environmental Management System
 18001:2007 Occupational Health & Safety Management System



DELIVERY APPROVED!
**LAND, SEA
 & AIR**

Fullriver batteries are sealed lead acid batteries made with Absorbed Glass Mat (AGM) technology. The electrolyte is absorbed into the fiberglass separator material rather than in a free-flowing liquid form. Fullriver batteries are non-spillable electric storage batteries. They are excepted from the requirements of DOT's hazardous materials regulations, since they adhere to the requirements of code 49 CFR Section 173.159(D) - (CLASSIFIED APPROVED: DOT, CFR, HMR49, IATA, ICAO67, IMDG27)